


# 65G40 Concrete Floor or Deck

For 65ARG40, 65PHG40, 65PSG40, 65TRG40, and 65TRTiG40.




## Slab on Ground

Waterproofing is fixed to the floor flange

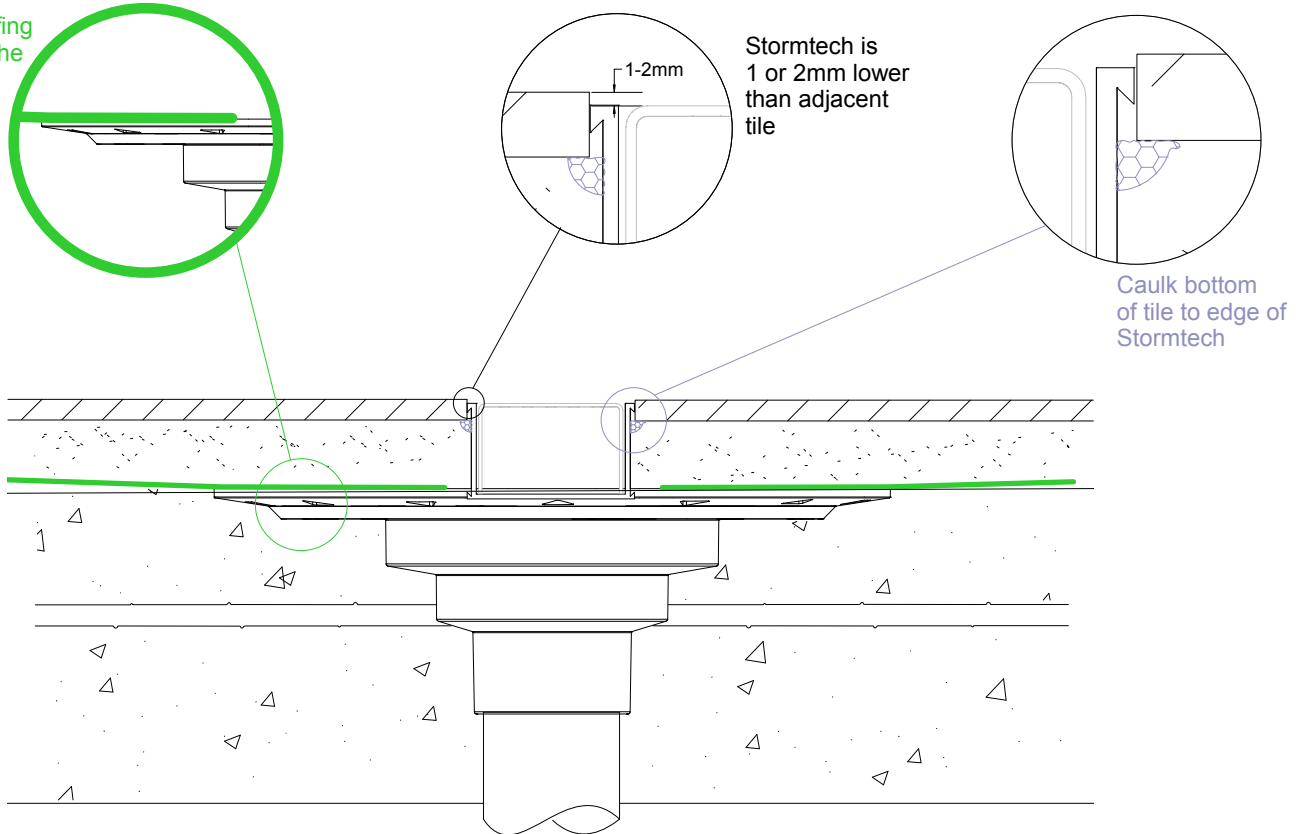

## Suspended Slab

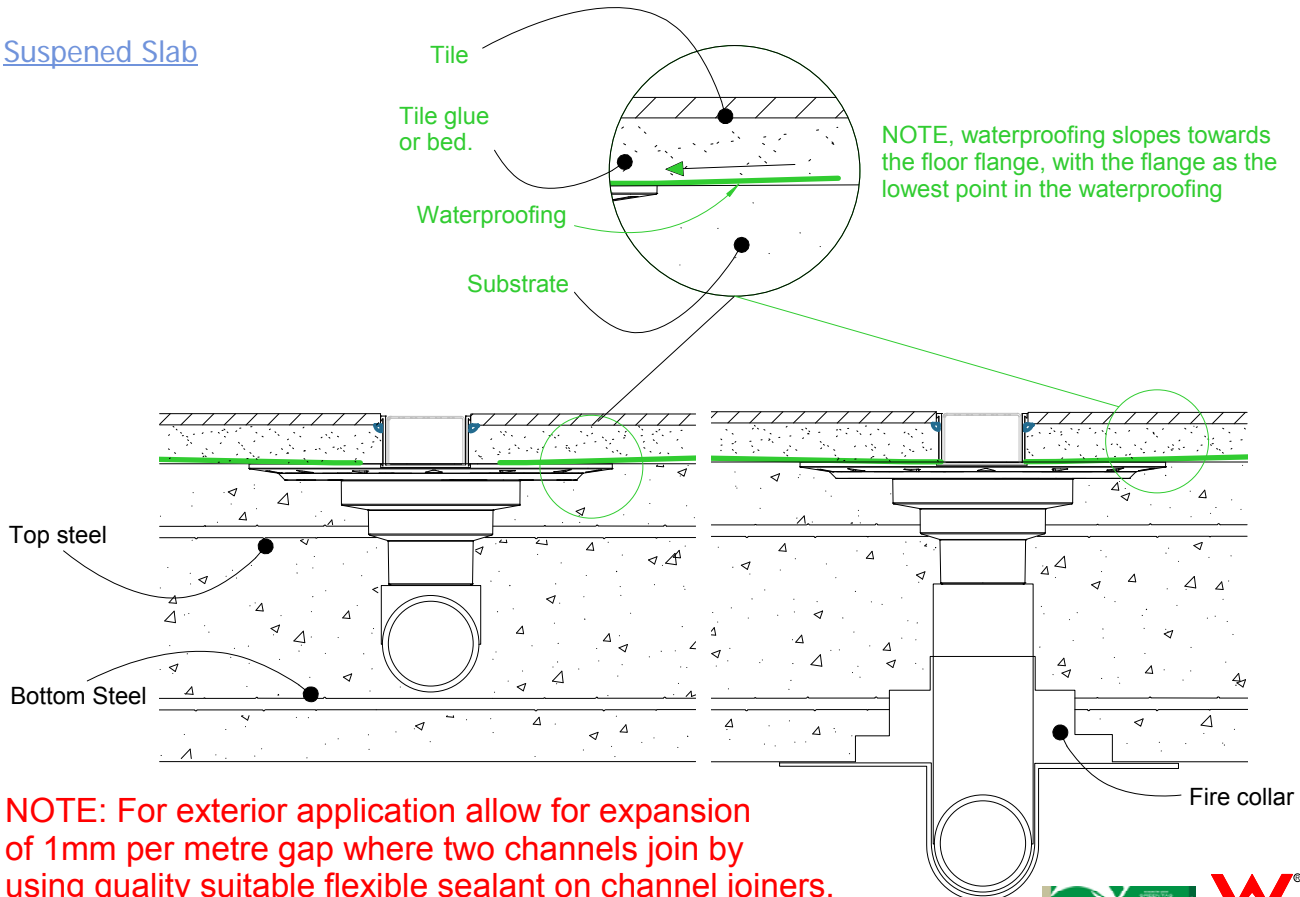

**NOTE: For exterior application allow for expansion of 1mm per metre gap where two channels join by using quality suitable flexible sealant on channel joiners. Use PVC solvent cement and primer on ends and outlets.**

