




65TiG25

Tile Insert Drain



Steel Grade 316

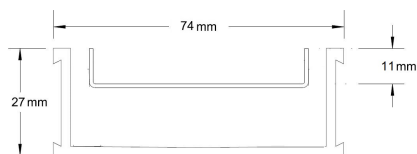


The 65TiG25 is a modular drainage system with a stainless steel tile insert and uPVC channel.

Suitable for tiles up to 10mm thick.

SPECIFICATIONS + DIMENSIONS

Channel Width	74mm			
Channel Depth	27mm			
Length(s)	900mm	1000mm	1200mm	1500mm
	1800mm	2000mm	1900mm	2200mm
	2400mm	2700mm	3000mm	
Outlet Size	DN40, DN50			

STORMTECH COLOUR FINISHES



Electroplate finishes subject to natural variation with time and local environment. Factors such as pools/surf beaches may require electropolishing. Contact us for suitability.

PRODUCT APPLICATIONS

Bathroom Drainage
Aged / Health Care Drainage
Balcony Drainage
Commercial Drainage
Courtyard / Patio Drainage
Pool and Spa Area Drainage

Hospitality Drainage
Paved Area Drainage
Shower Drainage
Multi-Residential Drainage
Special Needs Drainage
Threshold Drainage

Copyright © Stormtech Pty Ltd. Patent 733361. Drawings not to scale, please use dimensions shown.
Downloaded 27/04/2025 (please check for updates)



Visit **stormtech.com.au**
for tools + inspiration.

Phone **1300 653 403**

Email **info@stormtech.com.au**