



# Landscape linear drainage.

By Stormtech™

Architectural outdoor drainage for flexible landscape and pool design.





## High performance landscape drainage.

High capacity surface water drainage designed for driveways,  
paved areas, pools and garden edges.




### LANDSCAPE LINEAR DRAINAGE

Narrow profile, high capacity drainage systems allowing flexibility in pool design and landscape applications. Stormtech drainage systems are Greentag certified and architecturally designed for a luxury finish with high capacity water removal.


### SMART DESIGN + EASY INSTALLATION

From concept to installation, Stormtech drainage offers the ultimate in flexibility when designing creative landscapes.

Stormtech delivers ease of installation and the perfect finish with comprehensive assembly instructions and detailed installation information.



Special Assembly Pool Surround Installation



65G90 | 65G100 | 65G150

Drainpipe Diameter  
90mm / 100mm / 150mm  
Channel Width  
65mm / 38mm


### SPECIAL ASSEMBLY

Developed for high performance drainage needs, the Special Assembly range provides unmatched flexibility in landscape and pool design and is ideally suited to wet-edge and infinity pool applications.

Available with either a 38mm or 65mm uPVC channel, connected via downpipes at 200mm intervals to sockets in a 90mm, 100mm or 150mm drain below.

**Special Assembly is completed with a Punched Slot, Standard or Premium Architectural Grate in 65mm or 38mm width.**


Recognised with a DesignMark for innovation at the Australian International Design Awards.



65AR40  
Architectural Grate



65PS40  
Punched Slot Grate



65TR40  
Standard Grate



38AR40  
Architectural Grate



38PS40  
Punched Slot Grate




SD90 | SD90H  
90mm Drainpipe  
Beige uPVC Channel

### SLOT DRAIN

The Slot Drain is a uPVC insert featuring a 25mm opening on the top with 20 slots draining into a concealed 90mm drain pipe. The PVC channel insert comes with 10mm or 13mm holes at 50mm intervals.

**The Slot Drain can also be completed with the 30mm wide SDiAR Architectural Grate.**




SD90H



SD90 + SDiAR



SDiAR  
Architectural Grate

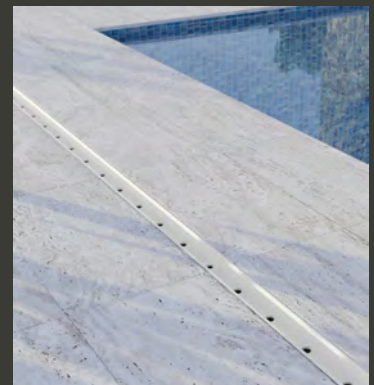



### SPECIAL ASSEMBLY FLOW RATES

PRODUCT CODE	GRATE INTAKE RATE PER METRE	FLOW RATE TO PIPE PER METRE	STORMWATER FLOW RATE AT 1% FALL
38G90	2.5 litre/sec	2.5 litre/sec	6 litre/sec (2.4m)
38G100	2.5 litre/sec	2.5 litre/sec	10 litre/sec (4m)
38G150	2.5 litre/sec	2.5 litre/sec	30 litre/sec (12m)
65G90	4 litre/sec	2.5 litre/sec	6 litre/sec (2.4m)
65G100	4 litre/sec	2.5 litre/sec	10 litre/sec (4m)
65G150	4 litre/sec	2.5 litre/sec	30 litre/sec (12m)

### SLOT DRAIN FLOW RATES

10mm holes + 50mm intervals	0.7 litre/sec per metre
13mm holes + 50mm intervals	1 litre/sec per metre
12mm open slot	2 litre/sec per metre
25mm open slot	4 litre/sec per metre

For critical performance always consult a hydraulic engineer.

Visit [stormtech.com.au](http://stormtech.com.au) for detailed assembly and installation information.

### COLOURS + FINISHES

All Stormtech drains are available in a range of electroplate finishes and powdercoat colours.

### ELECTROPOLISHING

For added protection against salt and chlorine in marine or pool environments, Stormtech recommends electropolishing your linear drainage for a superior surface finish and easier maintenance.



**Stormtech™**

Telephone 1300 653 403 | Web [stormtech.com.au](http://stormtech.com.au)

