100TDiS
Linear threshold Drainage System

For 100ARTDiS, 100MNDTDiD, 100TiTDiD, and 100PSTDiS.

Stormtech Level Threshold Compliance for NCC 2019 & NCC 2022.

Livable housing design, H8P1, (a), the Stormtech Threshold drain provides a continuous step-free path to a dwelling entrance door.

Rainwater management, H2P1 (2019: P2.2.1), the Stormtech Threshold drain collects and conveys surface water from vertical surfaces, such as doors, to an appropriate outlet, avoiding damage to the building.

Weatherproofing, H2P2 (2019: P2.2.2), the Stormtech Threshold drain prevents penetration of water into the building.

Surface water drainage, 3.3.3 (2019: 3.1.3.3), the Stormtech Threshold drain provides a minimum 50mm stepdown within the channel of the drain from internal finished floor level to the base of the external side of the Stormtech channel.

External Waterproofing, H2D8, the Stormtech Threshold drain is installed as per AS 4654.1 & AS 4654.2

Stormwater drainage, 3.3.5 (2019: 3.1.3.5) (a) & (b), the Stormtech Threshold drain is to have an integral overflow of equivalent capacity to the primary outlet. The overflow is to be plumbed separately to an appropriate overflow measure. Primary and overflow capacity is to comply with AS 3500.3 or the appropriate authority.

Termite risk management, 3.1.4 (2019: 3.1.4.2), and 3.4.2 (2019: 3.1.4.3), where required a termite management system is to be selected as per AS 3660.1 and AS 3660.3.

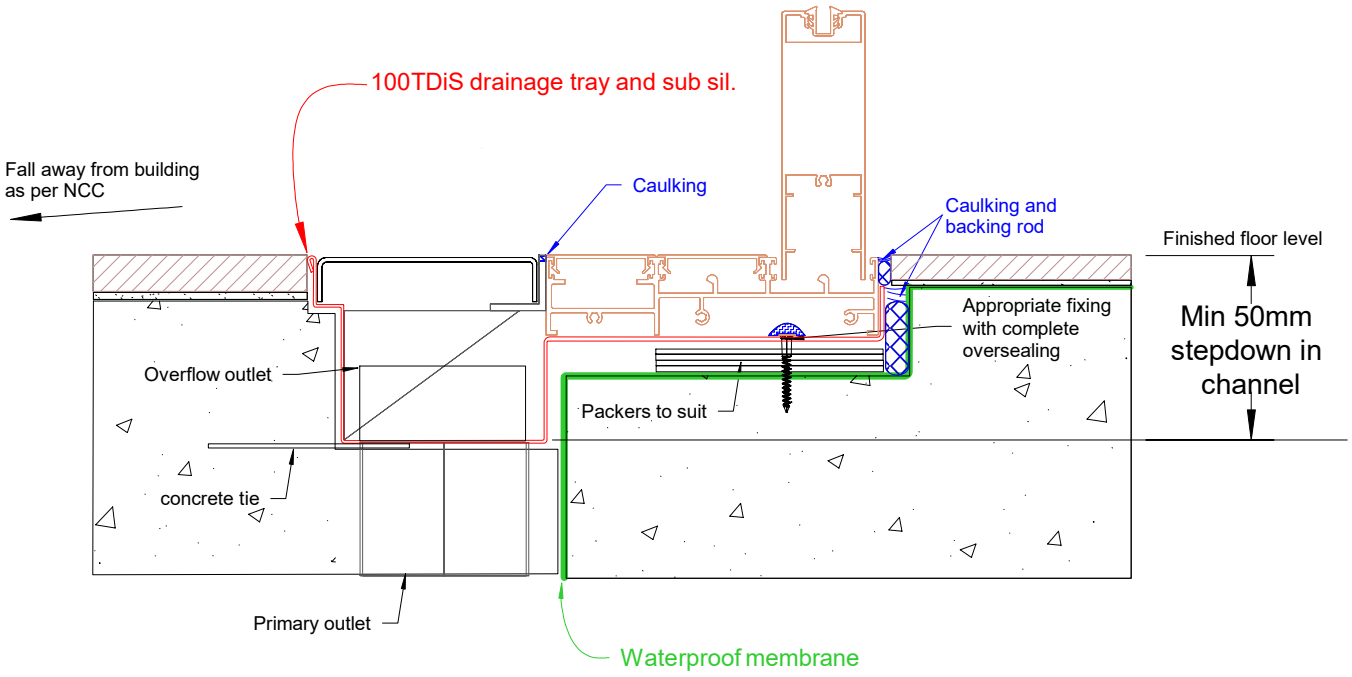

Copyright 1989-2022 Stormtech Pty Ltd

This drawing is the intellectural property of STORMTECH Pty Ltd.

Drawings are not to scale. Use dimensions shown.

Patent number: 733361

e info@stormtech.com.au, w www.stormtech.com.au