




ARCHITECTURAL
GRATES + DRAINS



38PS40 for 38G90 and 38G100

Linear Drainage System

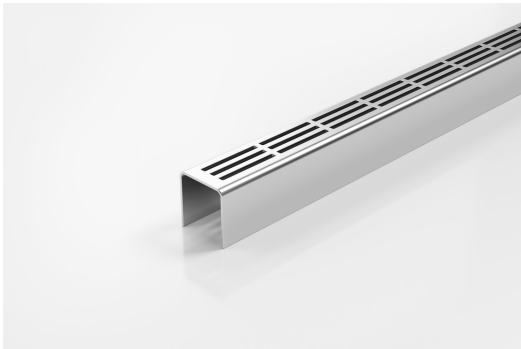

This is our Punched Slot grate for use with the 38G90 and 38G100 Special Assembly drain.

A 38mm wide UPVC channel is connected via downpipes at 200mm intervals to sockets in a 90mm or 100mm drain below. This allows the channel to be installed level while the drainpipe is given sufficient fall to be self-cleaning.

Please be aware that depending on the installation environment, for a pool installation or close to a surf beach, you may need to have your stainless steel grates electropolished.

This unique drainage system was recognised for its innovation by a DesignMark at the Australian International Design Awards.

Code 38PS40 for 38G90 and 38G100

Range Special Assembly

Grate Style PS

Category Components


Channel Material Stainless Steel

Steel Grade 316

SPECIFICATIONS + DIMENSIONS

| | |
|----------------------|----------------------------|
| Channel Width | 38mm |
| Channel Depth | 40mm |
| Length(s) | 900mm 1000mm 1200mm 1500mm |
| Outlet Size | N/A |

STORMTECH COLOUR FINISHES

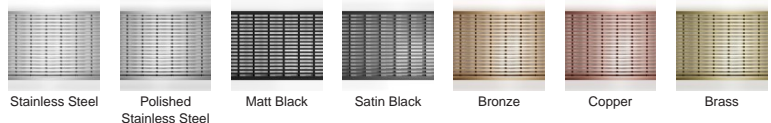

PRODUCT APPLICATIONS

- | | |
|----------------------------|-------------------------|
| Bathroom Drainage | Shower Drainage |
| Balcony Drainage | Special Needs Drainage |
| Commercial Drainage | Threshold Drainage |
| Courtyard / Patio Drainage | Suspended Slab Drainage |
| Pool and Spa Area Drainage | Wet Area Drainage |
| Paved Area Drainage | |

Copyright © Stormtech Pty Ltd. Patent 733361. Drawings not to scale, please use dimensions shown.



Visit stormtech.com.au
for tools + inspiration.

Phone **1300 653 403**

Email info@stormtech.com.au