


Flow Rate Guide



Intake Table

38 Range	Intake (l/s/m)
AR	3.00
PS (All Styles)	2.50
65 / 100 Range	
AR/TR	6.00
Punched	4.00
All Ti	0.70
SD90	
10mm Holes	0.70
13mm Holes	1.00
12mm Open Slot	2.00
25mm Open Slot	4.00
SQ Drains	
SQ Ti All	0.70
SQ All ex Ti	1.00

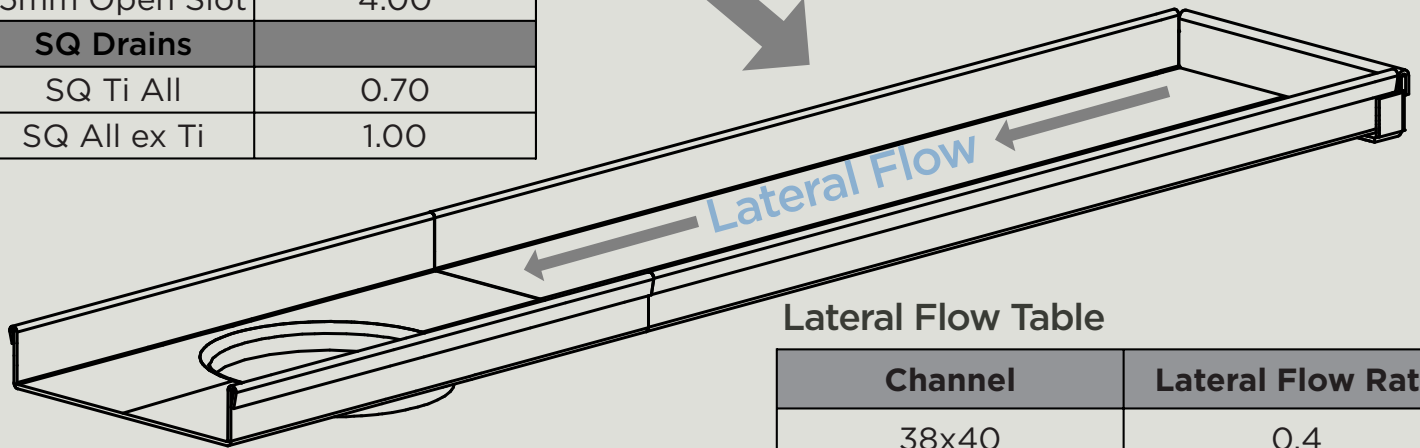

Outlet Discharge



Outlet Discharge Table

Channel	Outlet DN40 Spigot l/s	Outlet 50 Spigot l/s	Outlet DN80 Spigot l/s	Outlet DN100 Spigot l/s
38x40	0.5	-	-	-
65x40	0.5	1.0	-	-
65x25	0.5	0.5	-	-
100x20	0.5	0.5	0.5	0.5
100x30	0.5	0.8	1.0	1.0
100x40	0.5	1.0	1.0	1.0
SQTi		0.38	0.38	0.38

Lateral Flow Table

Channel	Lateral Flow Rate
38x40	0.4
65x40	0.7
65x25	0.4
100x20	0.4
100x30	0.6
100x40	0.9

Visit stormtech.com.au for detailed assembly and installation information.



ARCHITECTURAL
GRATES + DRAINS