

# Order Form

## Grate and Channel with Wall Tiling Flanges and Floor Tiling Flanges



stormtech.com.au  
 Phone 1300 653 403  
 Fax 02 4423 5552  
 Email info@stormtech.com.au

### Step 1 Select Grate or Tile Insert



**AR**  
 Premium Architectural Grate  
 2mm wire / 2.5mm gap



**TR**  
 Standard Grate  
 3mm wire / 5mm gap



**Ti**  
 Tile Insert



**PS**  
 Punched Slot Grate


### Step 3 Select Required Flanges

WF - Wall Flange - Measurement is between both wall linings

FF - Floor Flange - **Measurement includes 50mm floor flange on ends**


WF (Wall Flange)  FF (Floor Flange)

WF  
 FF

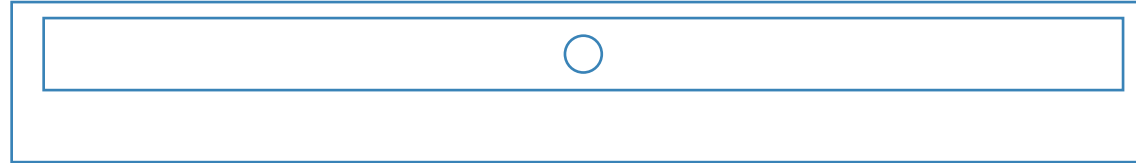

WF  
 FF

### Step 4 Select Length




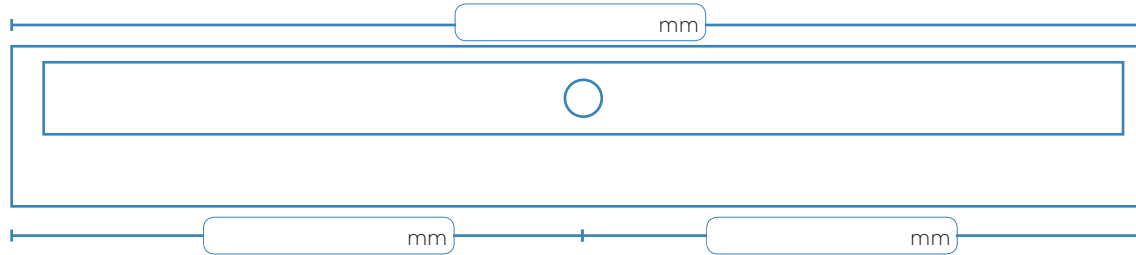


**Step 5** Select Outlet Position Outlet Size  38mm  44mm  51mm  63mm  76mm  89mm  50.8mm Male (Threaded at extra cost)

**When using 50mm floor flanges on the channel ends, include them in the overall channel length**

### Step 2 Select Tray Profile

C/O = Clear Opening

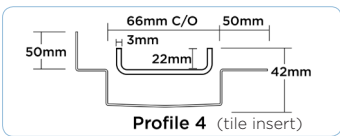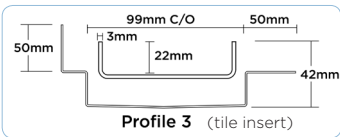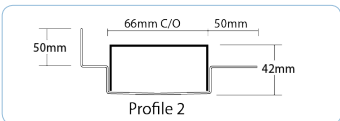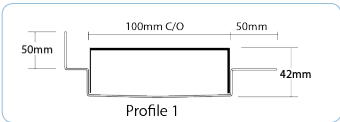

### Step 6 Select Tile Thickness


**WF - Wall Flange**  
 Wall Tiling Flange / Upstand  
 (Allow for waterproofing, tile glue and tile)

- 13mm (Suites 8mm Tile)
- 15mm (Suites 10mm Tile)
- 20mm (Suites 15mm Tile)
- 25mm (Suites 20mm Tile)
- Other \_\_\_\_mm



**FF - Floor Flange**  
 Height Above Floor Flange  
 (Allow for waterproofing, tile glue and tile)

- 10mm (Suites 6mm Tile)
- 13mm (Suites 8mm Tile)
- 15mm (Suites 10mm Tile)
- 20mm (Suites 15mm Tile)
- 25mm (Suites 20mm Tile)
- Other \_\_\_\_mm

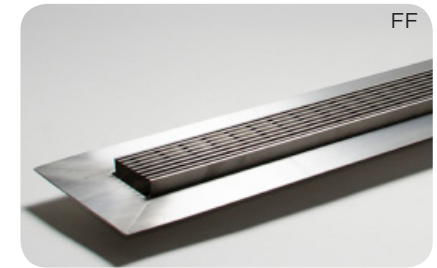

Full Name \_\_\_\_\_ Company Name \_\_\_\_\_ Email Address \_\_\_\_\_

Telephone \_\_\_\_\_ Order Number \_\_\_\_\_ Stormtech Quote Number \_\_\_\_\_ Signature \_\_\_\_\_