

Order and Quote Form

Made-to-Length

Shower Screen Support Grate + Channel



Select Grate Style



☐ **AR Architectural**
2mm wire
2.5mm gap



☐ **TR Standard**
3mm wire
5mm gap



☐ **Ti Tile Insert**



☐ **MND Marc Newson**



☐ **PS Punched Slot**




☐ **PPS Punched Perpendicular Slot**




☐ **PAS Punched Angle Slot**

Grate + Channel Profiles



AR




TR

*Suits up to 10mm tile thickness



Ti



MND, PS, PPS, PAS


Shower Screen Position + Dimensions Choose Right OR Left Screen Position to Suit Requirements

1. RIGHT POSITION SHOWER SCREEN

Required Outlet Size

☐ 76mm* ☐ 89mm

* Only suitable with DN80 riser

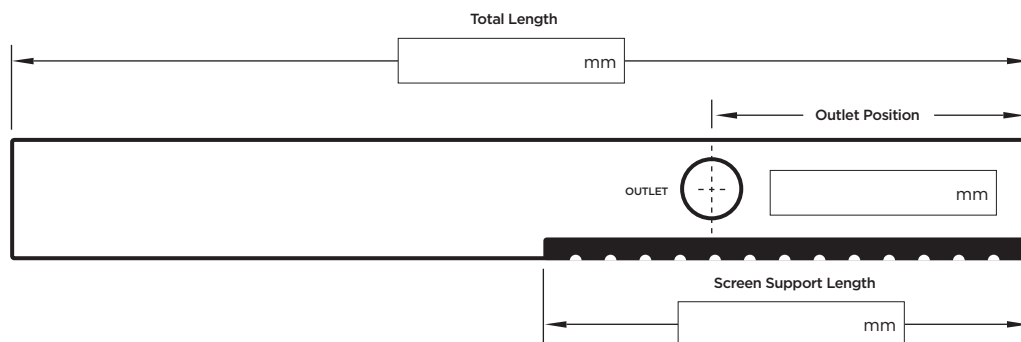


2. LEFT POSITION SHOWER SCREEN

Required Outlet Size

☐ 76mm* ☐ 89mm

* Only suitable with DN80 riser

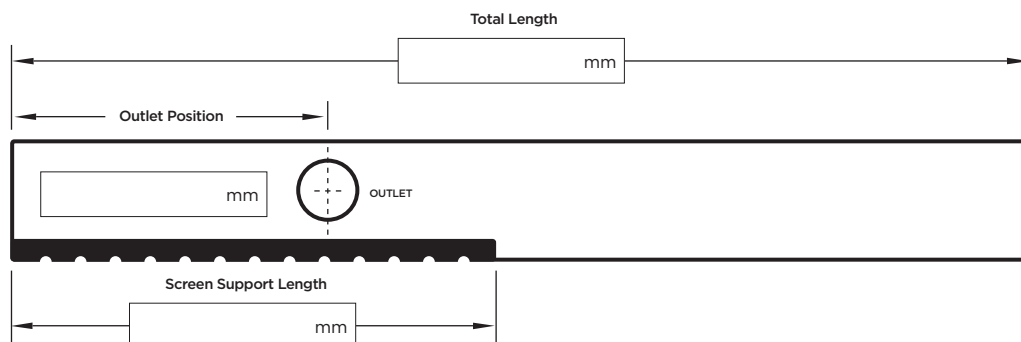

Please Note

See AS3500 standard & local regulator for specific outlet and drainage requirements. Stainless Steel Grade is 316 unless specified. Minimum charge of 1000mm. Grates longer than 1500mm and Tile Inserts longer than 1200mm are supplied in multiple sections. Channels 3000mm maximum in one piece, channels over 3000mm are supplied in multiple sections with joiner. +/- 2mm tolerance on dimensions.

Full Name

Company Name

Telephone

Email Address

Order Number

Stormtech Quote Number

Signature

Phone 1300 653 403 | Fax 02 4423 5552

Email info@stormtech.com.au



stormtech.com.au