

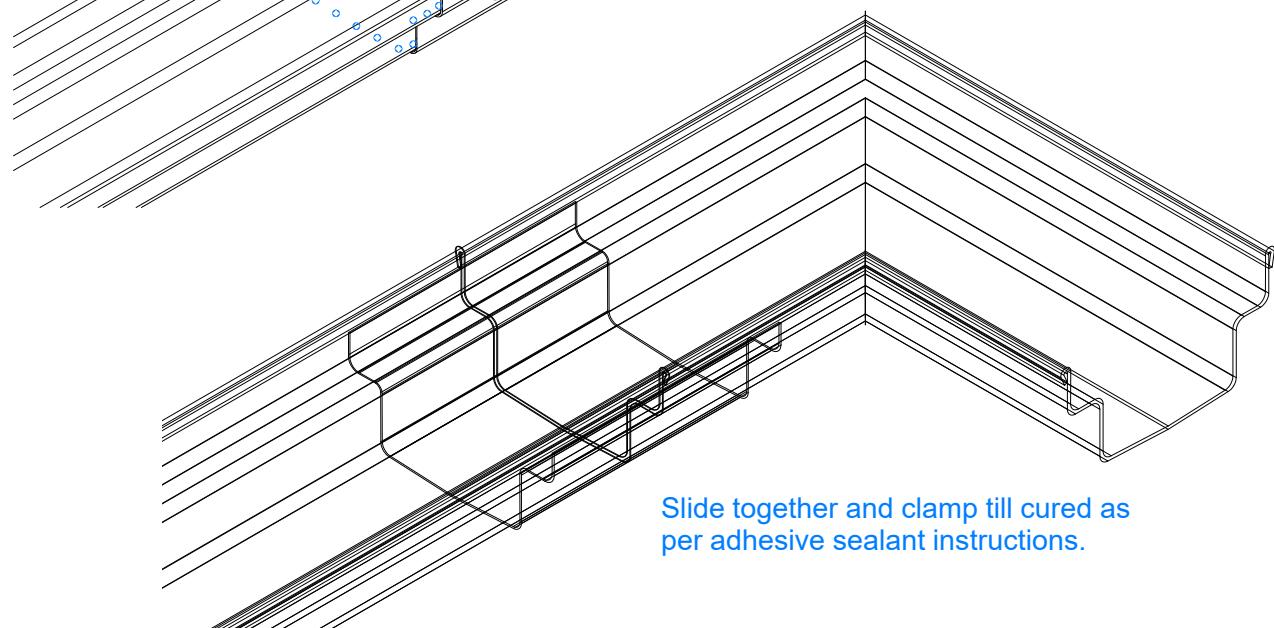


# Welded joiner sealing

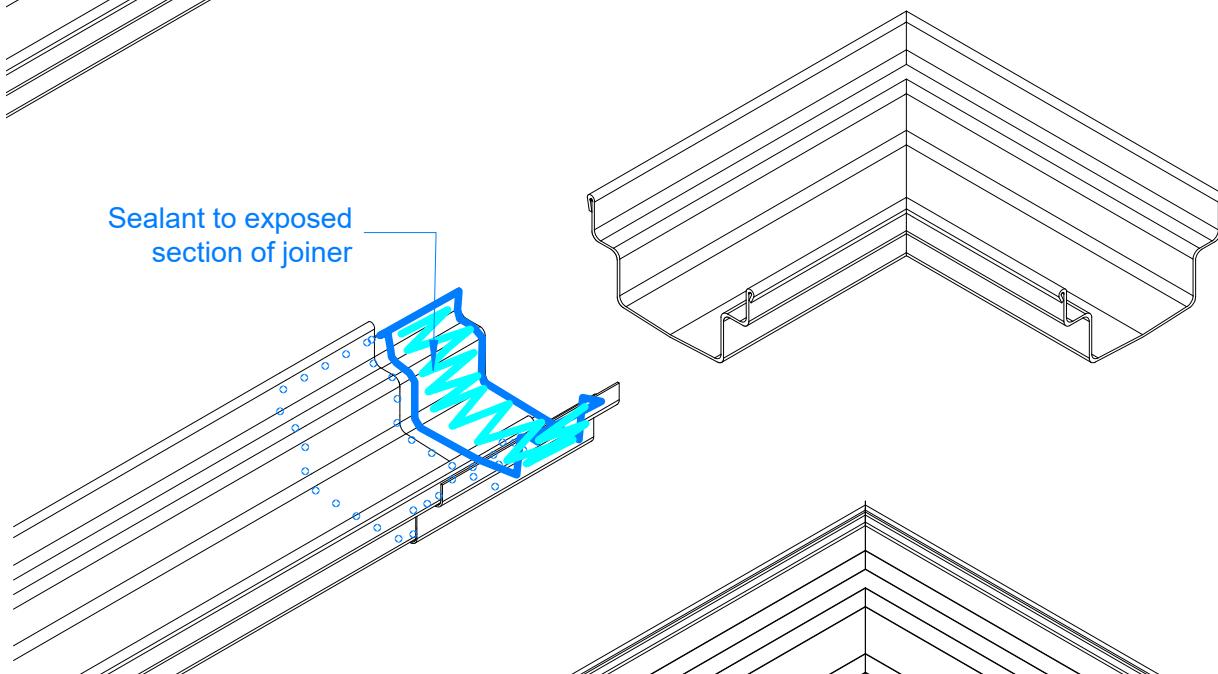

Suggested sealant is a polyurethane adhesive sealant such as Sika 11FC suitable for stainless steel. NOTE, follow surface preparation and priming instructions for selected sealant.

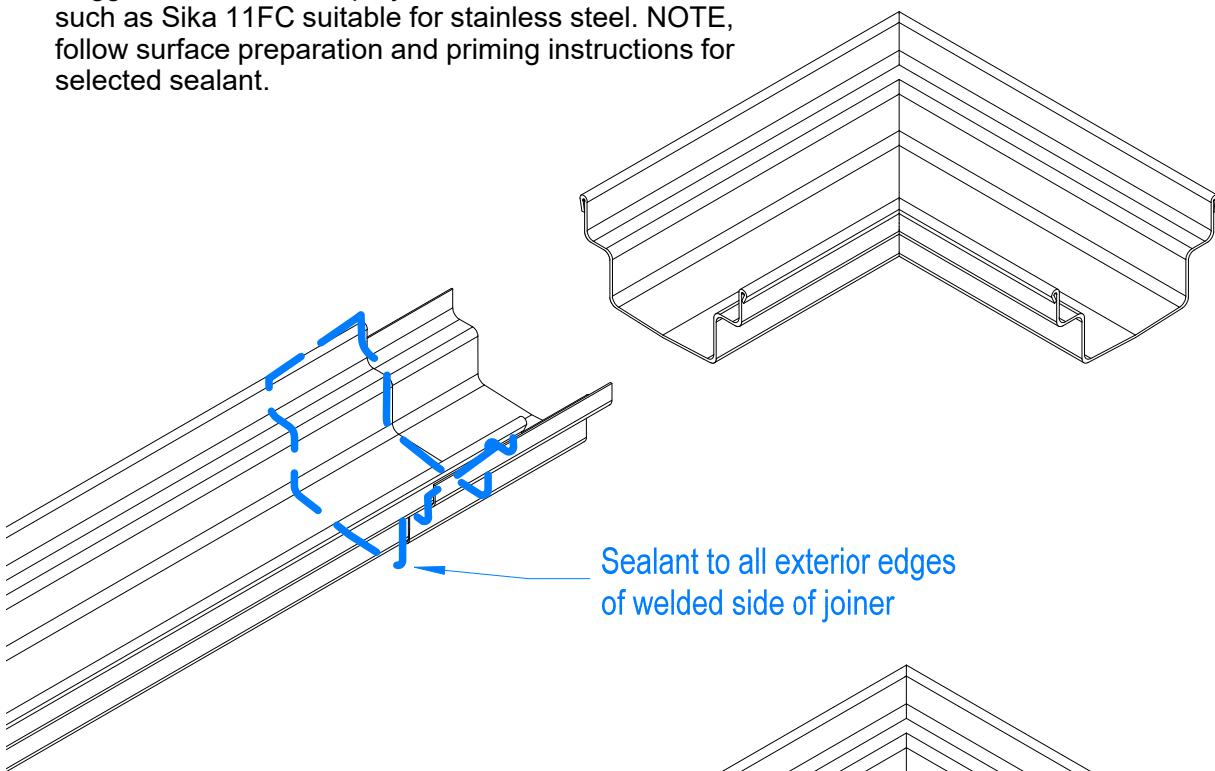

WaterMark  
Level 2 Licence WMKT 21249

Copyright Stormtech® Pty Ltd

This drawing is the intellectual property of STORMTECH Pty Ltd.

Drawings are not to scale. Use dimensions shown.

Patent number: 733361

e [info@stormtech.com.au](mailto:info@stormtech.com.au), w [www.stormtech.com.au](http://www.stormtech.com.au)

TC200126R0



## Standard Joiner (loose joiner).

Ensure all external edges are sealed.  
 Ensure all surfaces in contact with each other are sealed.

Suggested sealant is a polyurethane adhesive sealant.  
 Ensure sealant is suitable for stainless steel.  
 Follow surface preparation and application instructions of the sealant manufacturer.

