




ARCHITECTURAL
GRATES + DRAINS



65G100

Linear Drainage System

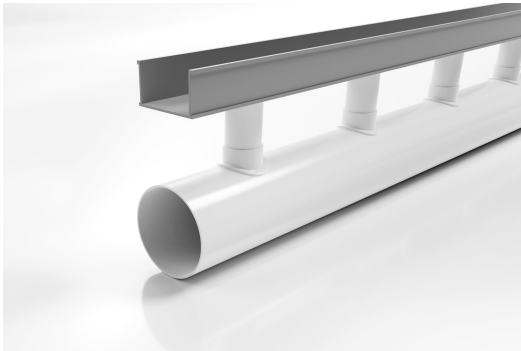

Developed for high capacity drainage needs, providing flexibility in landscape and pool design.

100mm Drainpipe with 65G UPVC Channel.

A 65mm wide UPVC channel is connected via downpipes at 200mm intervals to sockets in a 100mm drain below.

This allows the channel to be installed level while the drainpipe is given sufficient fall to be self-cleaning.

The Special Assembly is then completed with a stainless steel grate from the AR, TR or PS series.

Please be aware that depending on the installation environment, for a pool installation or close to a surf beach, you may need to have your stainless steel grates electropolished.

This unique drainage system was recognised for its innovation by a DesignMark at the Australian International Design Awards.


Please note stainless steel grates to complement this system are separate items

Code 65G100

Range Special Assembly

Category Fixed-Length Units

Channel Material uPVC

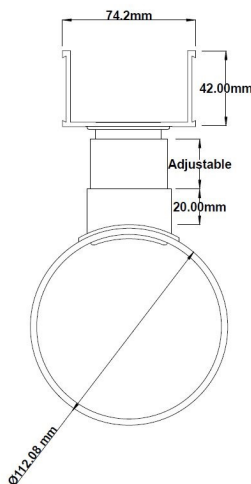

SPECIFICATIONS + DIMENSIONS

| | |
|----------------------|--------|
| Channel Width | 74mm |
| Channel Depth | 42mm |
| Length(s) | 3000mm |
| Outlet Size | N/A |

PRODUCT APPLICATIONS

| | |
|----------------------------|-------------------------|
| Balcony Drainage | Special Needs Drainage |
| Commercial Drainage | Suspended Slab Drainage |
| Courtyard / Patio Drainage | |
| Driveway Drainage | |
| Pool and Spa Area Drainage | |
| Paved Area Drainage | |

Copyright © Stormtech Pty Ltd. Patent 733361. Drawings not to scale, please use dimensions shown.



Visit stormtech.com.au
for tools + inspiration.

Phone **1300 653 403**

Email info@stormtech.com.au