


FlexiFlange

GAME CHANGING **FLEXIBILITY**



**THE FIRST AND ONLY
DEEMED TO SATISFY
COMPLIANT
FLEXIBLE FLOOR FLANGE**

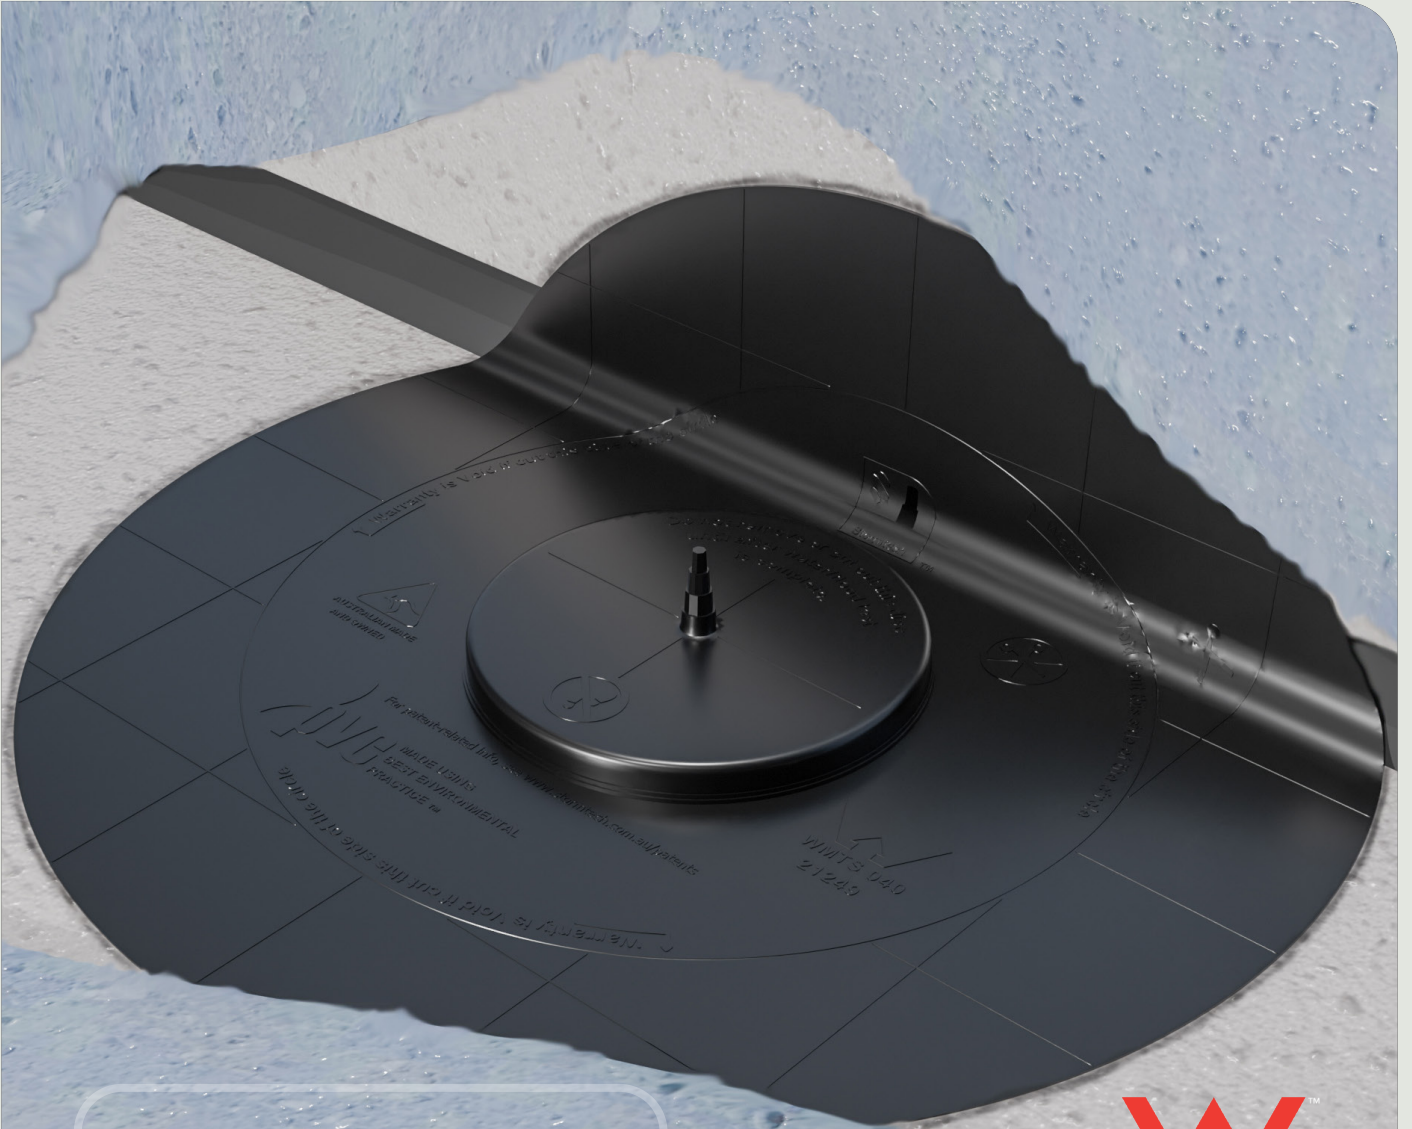

Patented
Australian
design by
Stormtech

For patent related info visit:
www.stormtech.com.au/ip



WaterMark




**ISO 9001
CERTIFIED**



GAME CHANGING FLEXIBILITY

FlexiFlange

1. Gauge lines on upper for easy measurement and trimming
2. Removable riser plug prevents debris blocking drain
3. Integral flood test level gauge
4. Easily flex to conform to other surfaces such as wall and floor junction
5. Dry film thickness gauges of 1 and 2 mm to assist waterproofing
6. Large diameter for extra variability
7. Labyrinth seal prevents backflow while allowing weep from underside
8. Ultra thin profile

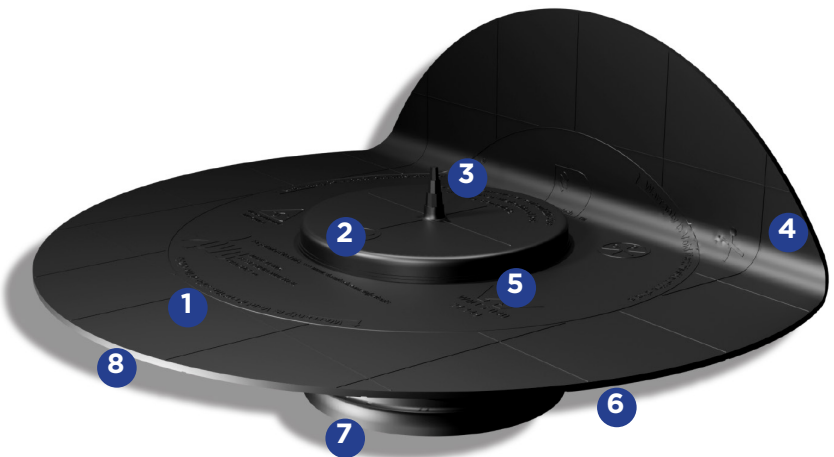

Highly versatile, widely compatible

Compatible with DN100 pipe, and all PVC, sheet and liquid waterproofing membranes (excluding bitumen)


Don't Compromise Position

Easily achieve compliant against the wall drainage with a flange that conforms to wall and floor junctions



Product Facts

Product Code	100Flex
Overall Diameter	300mm
Depth	60mm
Flange Thickness	≈2mm
Compatible With	DN100 pipe
Compliant With	Watermark WMTS-040, NCC Parts 1&2 2022, Housing Provisions, AS3740, AS3500.2, AS4654.1
Certifications	Watermark, ISO9001, Best Environmental Practice PVC

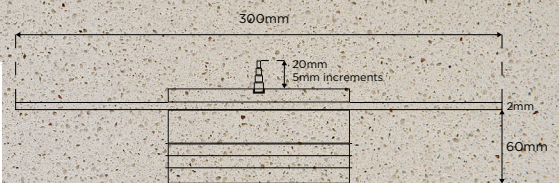

Discover More

